

Sprinter 900Global, 3. turnaj



Oil Pattern Distance: 35 Feet **Reverse Brush Drop:** 35 Feet **Oil Per Board:** 50 uL
Forward Oil Total: 10.55 mL **Reverse Oil Total:** 13.35 mL **Volume Oil Total:** 23.9 mL
Forward Boards Crossed: 211 Boards **Reverse Boards Crossed:** 267 Boards **Total Boards Crossed:** 478 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	1	14	37	0.0	0.0	0.0	1850
2	5L	5R	2	14	62	0.0	3.9	3.9	3100
3	6L	6R	2	18	58	3.9	9.0	5.1	2900
4	7L	7R	2	18	54	9.0	14.1	5.1	2700
5	2L	2R	0	22	0	14.1	26.0	11.9	0
6	2L	2R	0	26	0	26.0	35.0	9.0	0


Navigation: Forward Reverse More

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	35.0	28.0	-7.0	0
2	8L	8R	1	18	25	28.0	25.5	-2.5	1250
3	7L	7R	2	18	54	25.5	20.4	-5.1	2700
4	6L	6R	2	14	58	20.4	16.5	-3.9	2900
5	5L	5R	2	14	62	16.5	12.6	-3.9	3100
6	4L	4R	1	14	33	12.6	10.7	-1.9	1650
7	3L	3R	1	14	35	10.7	8.8	-1.9	1750
8	2L	2R	0	14	0	8.8	0.0	-8.8	0

Navigation: Forward Reverse More

Conditioner: Fire
TransferType: Transfer Roller

- Forward
- Reverse
- Combined
- Buff

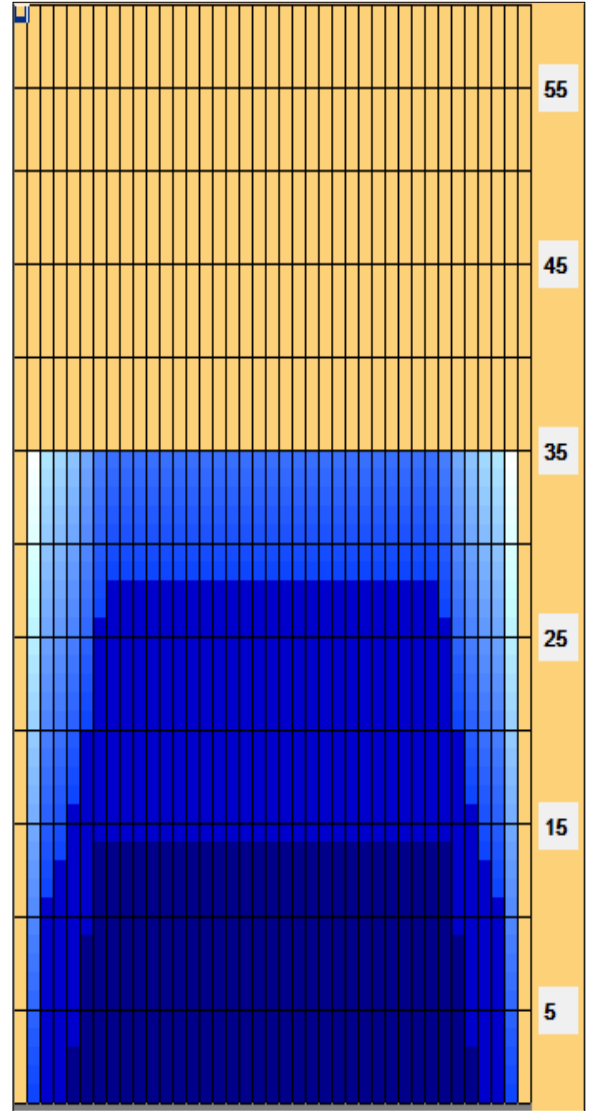

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	2.11	1	1	1	1	2.11

