



# 900Global Sprinter - dlouhé mazání

**Oil Pattern Distance:** 45 Feet      **Reverse Brush Drop:** 45 Feet      **Oil Per Board:** 50 uL  
**Forward Oil Total:** 10.3 mL      **Reverse Oil Total:** 13 mL      **Volume Oil Total:** 23.3 mL  
**Forward Boards Crossed:** 206 Boards      **Reverse Boards Crossed:** 260 Boards      **Total Boards Crossed:** 466 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	3	14	111	0.0	3.9	3.9	5550
2	12L	12R	1	14	17	3.9	5.8	1.9	850
3	13L	13R	2	18	30	5.8	10.9	5.1	1500
4	14L	14R	2	18	26	10.9	16.0	5.1	1300
5	15L	15R	2	18	22	16.0	21.1	5.1	1100
6	2L	2R	0	18	0	21.1	26.0	4.9	0
7	2L	2R	0	26	0	26.0	36.0	10.0	0
8	2L	2R	0	30	0	36.0	45.0	9.0	0

◀ ▶ ▶▶ ▶▶▶ Forward Reverse More

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	45.0	36.0	-9.0	0
2	14L	14R	2	22	26	36.0	29.8	-6.2	1300
3	13L	13R	2	18	30	29.8	24.7	-5.1	1500
4	12L	12R	2	18	34	24.7	19.6	-5.1	1700
5	11L	11R	2	14	38	19.6	15.7	-3.9	1900
6	10L	10R	1	14	21	15.7	13.8	-1.9	1050
7	2L	2R	3	14	111	13.8	7.9	-5.9	5550
8	2L	2R	0	14	0	7.9	0.0	-7.9	0

◀ ▶ ▶▶ ▶▶▶ Forward Reverse More

Conditioner: Fire

TransferType:  
Transfer Roller

Forward




Reverse



Combined



Buff

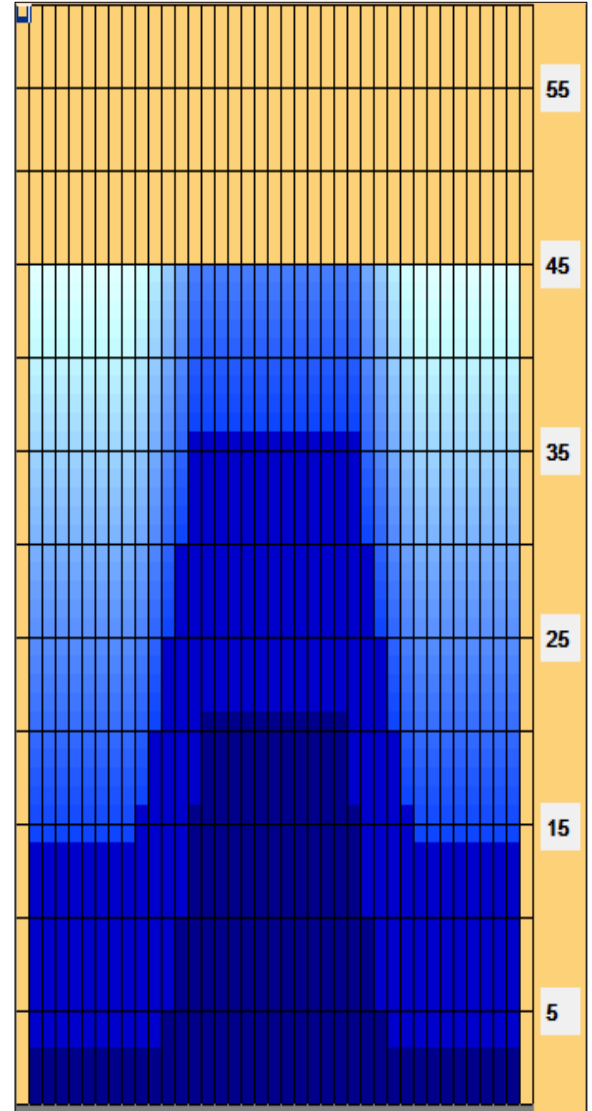

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	3.67	2.75	1.08	1.08	2.75	3.67

